



HANDLE

CAPBs® device

Description

Modular display and control unit for all CAPBs® sensors. The TFT colour display shows the measured values of the installed CAPBs® sensor in real-time. The CAPBs® device is equipped with navigation key, magnets at the rear and a sounder for signals specific to certain measured values. The CAPBs® device can be extended by additional functions such as a professional data logger (IF 20) using replaceable interface modules.

Technical specifications


Dimensions (W x H x D):	62 x 155 x 42 mm
Display:	2.4" TFT colour display, W x H: 38 x 50 mm
Weight:	300 g
Supply voltage:	Lithium-ion battery /mains operation (USB-C)
Interface:	Bluetooth®: iOS, Android, Windows QR-Code: iOS, Android, USB-C: Windows
Scope of delivery:	CAPBs® device, CAPBs® Interface basic IF 10, power supply unit NTE 5, charging cable USB-A to USB-C (1 m)

1


Front



Rear

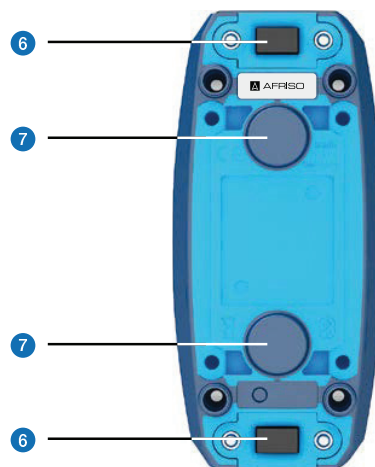

Top/bottom



- 1 Large 2.4" TFT colour display
- 2 Key with status LEDs
- 3 Protective rubber coat
- 4 Slot for CAPBs® sensor modules or CAPBs® interface modules
- 5 Interface module with USB connection for charging
- 6 Unlocking mechanism for removing the sensor module or the interface module
- 7 Magnet
- 8 Snap-in mechanism for sensor module or interface modules



DG: B, PG: 4	Part no.	Price €
CAPBs® device with Interface basic IF 10	P00052	
CAPBs® device logger with Interface Logger IF 20	P00100	
CAPBs interface logger IF 20	M094003911	